

Concrete Pipe Lifter RVD-4-ECO-F: 50% Time Savings in Pipe Handling by 1-Man Operation

The universal installation device for unloading, transport and installation of steel reinforced concrete pipes (such as sewer pipes) w/diameters from 300 to 1,200 mm and a maximum weight of 4 tons.

There is no need for using slings or chains. By means of the mechanical clamping mechanism pipes cannot slip off thus accurate placement can be easily effected.

- **Flexible:** The pipe lifter RVD-4-ECO-F can be simply attached to any excavator via the integrated, universal flange plate, using a quick-hitch coupling
- **Simple to use:** autonomous, simple pick-up of the pipe lifter through the digger driver, requires no mounting procedure, short training time for employees




- **Safe:** no personal needed for pick-up and put down the pipes, thus heavy reduction in potential hand-injuries
- **Profitable:** very short payback period and excellent return on investment due to 50% saving on installation time



Manhole Frame Clamp SRZ-M: Leightweight, Efficient and Profitable

Special clamp for safe and healthy pick-up and installation of manhole frames and concrete support rings.

- Grips from the inside, w/removable handles, electro-galvanized
- Up to 625 mm inner diameter
- Perfect equipment for repair works and for precise installation

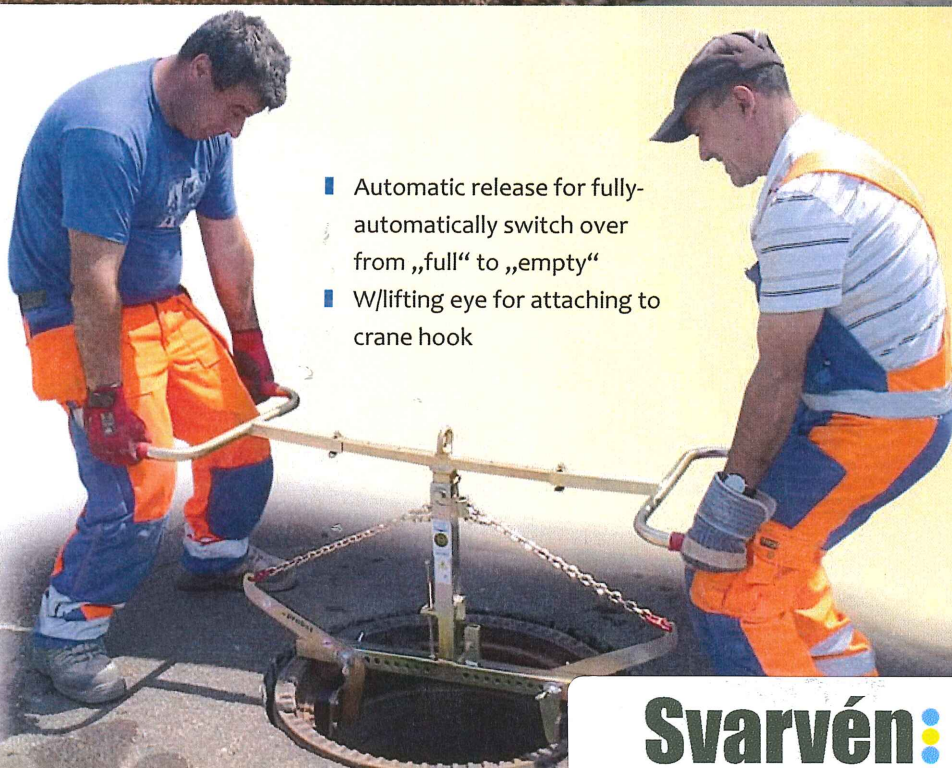

- Automatic release for fully-automatically switch over from „full“ to „empty“
- W/lifting eye for attaching to crane hook

Svarvén:

Tel: 08-711 14 49
Mejl: info@svarven.se
www.svarven.se